

WHEN BUILDING A STAND ALONE STRUCTURE, THE EXACT LOCATION OF THE FRAMING MEMBERS IS VERY IMPORTANT

2 De la Companya de l

- -True
- -False





MOST RETRACTABLE TAPE MEASURES INDICATE 16 INCH ON CENTER MARKS WITH SOME TYPE OF SPECIFIC MARK

2 DO BOS SINGS OF A A CO


- -True
- -False





SQUARE LINES ARE MADE AT THE LAYOUT MARKS AND ON "X" IS PLACED ON EACH SIDE OF THE MARK.

- -True
- -False

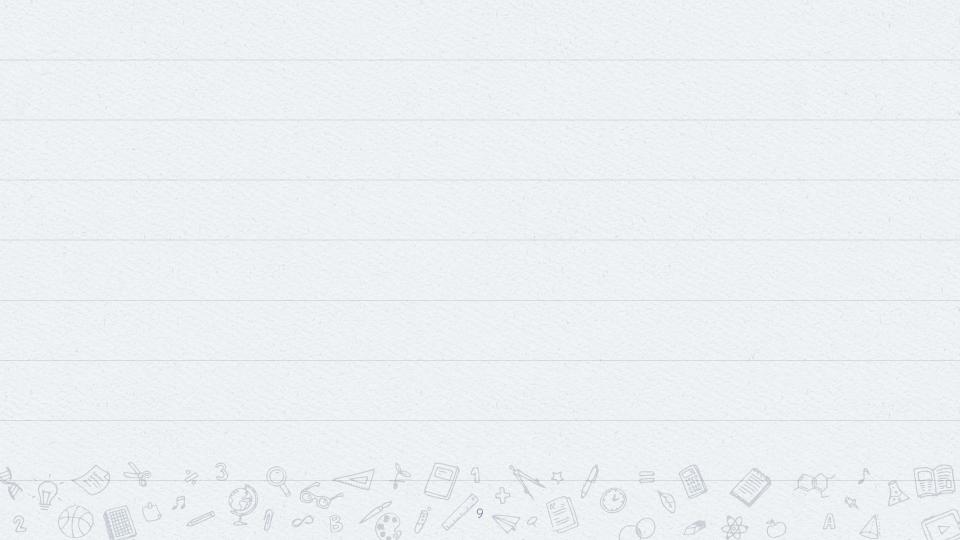



THE RIDGE BOARD IS A VERTICAL FRAMING MEMBER THAT IS LOCATED AT THE OUTSIDE EDGE OF THE ROOF.

2 DO BOS OF A A CO

- -True
- -False





FOR A F	FLOOR O	R WALL T	O BE SÓI	JARE, THE		_ MEASU	JKEMENTS
FROM	CORNER	R TO COR	NER WIL	L BE THE SA	AME, PRO	VIDING	THAT THE
		OPPOSIT	E SIDES A	RE EQUAL	IN LENG	TH.	

-framing

-layout

- -diagonal
- -on center





WHICH OF THE FOLLOWING IS NOT A BASIC PART OF FLOOR FRAMING?

-paling

-floor joists

- -rim joists
- -sheathing





A _____ STUD IS A COMMON STUD THAT IS USED AT WINDOW AND DOOR OPENINGS.

- -plate -trimmer
- -header
- -king






A _____ SQUARE IS TYPICALLY USED TO LAYOUT THE ANGLE CUTS ON THE RAFTER.


- -combination
- -framing
- -speed





ARE LOCATED AROUND THE PERIMETER OF THE BUILDING AND ARE NAILED ALONG THE ENDS OF THE FLOOR JOIST TO PREVENT THEM FROM TWISTING

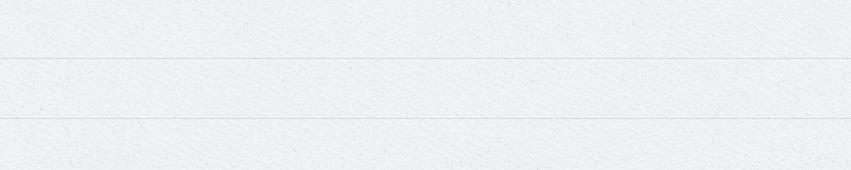

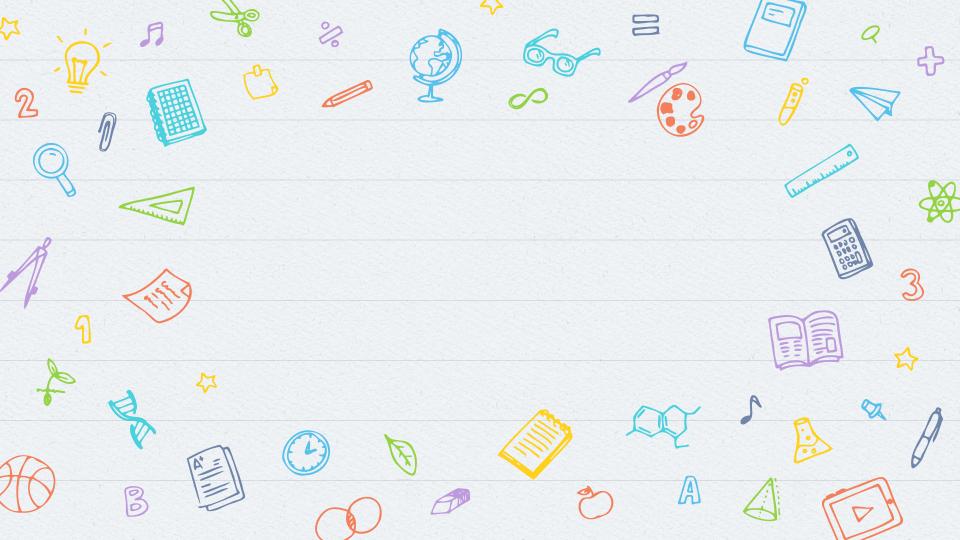



SHORTENED STUDS USED TO SUPPORT HEADERS ARE CALLED.







THE EQUAL SLOPED _____ROOF IS ONE OF THE MORE BASIC TYPES OF ROOFS TO BUILD.

